


## LOADING INSTRUCTIONS FOR AUTOS

Please be advised of the following requirements that must be complied to in order for the vehicle to be acceptable for loading:

- Fluids must be drained from the vehicles. **(GAS HAS TO BE DRAINED TO LESS THAN 1/8 OF A TANK.)**
- The batteries have to be disconnected and cable ends taped.
- Vehicles cannot be stacked one on top of another; they must be loaded side by side only.
- Each wheel of each vehicle must be blocked on both sides (inboard and outboard) and on the outside (wall of tire) of each tire. The blocking is to be positioned lengthwise to container.
- The blocking must be 2" x 6" x 24" in dimension and laminated (two high).
- Secure all blocking using 16 penny nails.
- Position the nails every 4 inches in an alternating pattern.
- Secure each vehicle with nylon banding (each corner of the vehicle), with one end of the banding secured to the Container D rings and the other one to the vehicle body.
- If loading two vehicles, place packing materials (panels of Styrofoam, or appropriate filler material) between the vehicles to prevent contact if shifting does occur.

### LOADING SCHEME

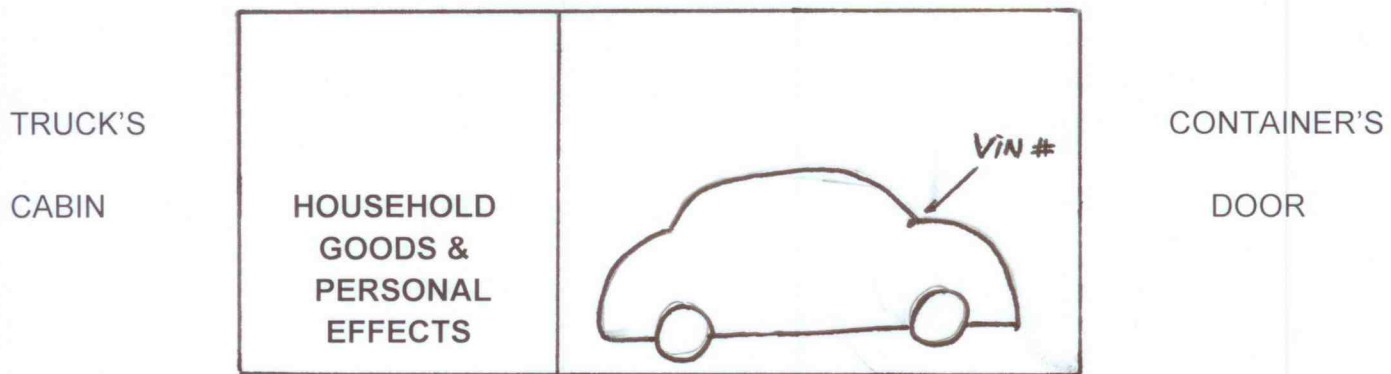

**LOAD HOUSEHOLD GOODS FIRST! LOAD AUTO NEXT TO THE CONTAINER'S DOOR IN A WAY THAT VIN# IS PROMINENTLY DISPLAYED.**